


English H-7641 USER MANUAL


A. Features

- 13 Digits, Hour, Minutes, Seconds, Month, Day and Week
- Daily Alarm, Month&Date, Alarm, and Chime hourly
- 1/100 second Chronograph with split count
- Second Time (DT) function
- Count Down (Upper limit: 24H)
- 2000----2099 Calendar, 12/24H
- EL backlight

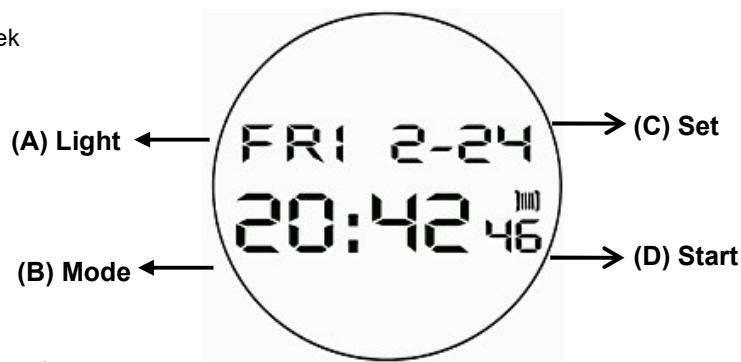

B. Operational Manual

- At any station, press A key, the EL back light on for 3 seconds.
- In Normal time Mode, Press B key to convert MODE as following :

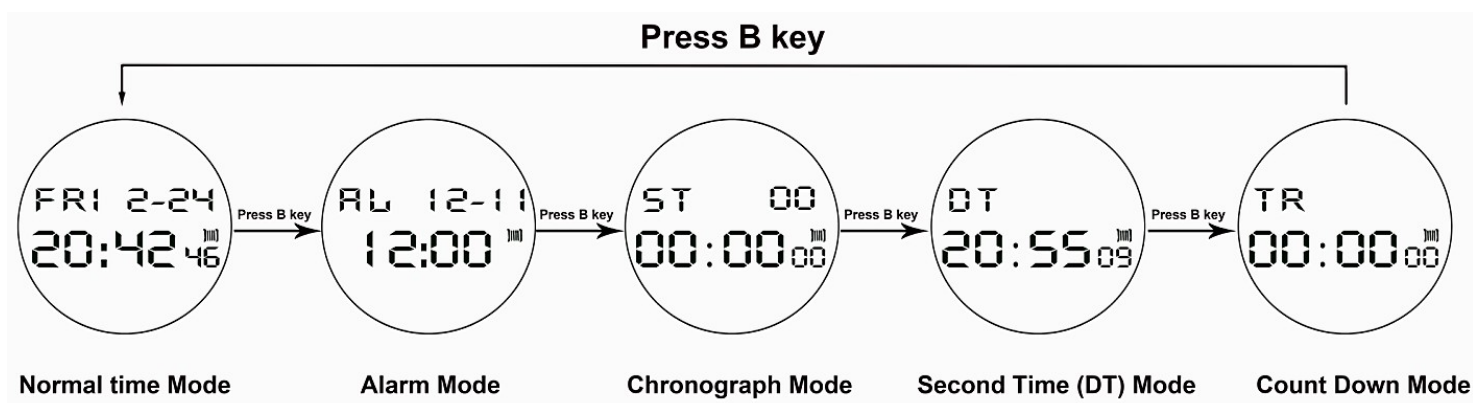

Time & date setting

- In Normal time Mode, press D key to convert 12H/24H, "P" means 12H
- In Normal time Mode, Hold C key till the Minutes flashing then enter into Time&Date setting Mode
- Press B to choose Hours - Minute-Year-Month-Date, Press D Key to adjust the data
- Press C key to exit.

Alarm ON/OFF

- In Alarm Mode, press C key to ON/OFF Alarm function.
- If "🔔" symbol appears, means ALM function ON, otherwise means OFF
- When the Alarm function chiming, the symbol will flashing and chiming for 10s, press any key to stop.


Alarm setting

- In Alarm Mode, Hold C key till the alarm Hours flashing enter into Alarm setting
- Press B to choose Alarm Hour -- Minute--Month--Date, Press D Key to adjust the data
- When you setting the Alarm Hour, pay attention to AM/PM
- When you setting the Alarm Month and Date, if you set the data of Month& Date, then on that Month& Date will alarm, if no data then means OFF the Month& Date alarm function
- If you ON the Alarm function, the alarm symbol will show in each Mode
- Press C to exit.

Chronograph functions

In Normal Mode, press B key twince, enter into Chronograph Mode

- Press D to start, press D again to suspend, press D again to continue, press D to suspend again,.....when suspend, press C key back to 0:00:00.
- In Chronograph mode, press D key to start, press C key enter into split function, and the "SPL" symbol appear, press C key again to get the first group record ,but the second group still processing in the back ground, press C key again to continue the second group, press C key again to read the second group record.....when the final group finished, Press D key to stop the SPL function, press C key read the final group(SUM) record, press C key again to clear the record to zero.

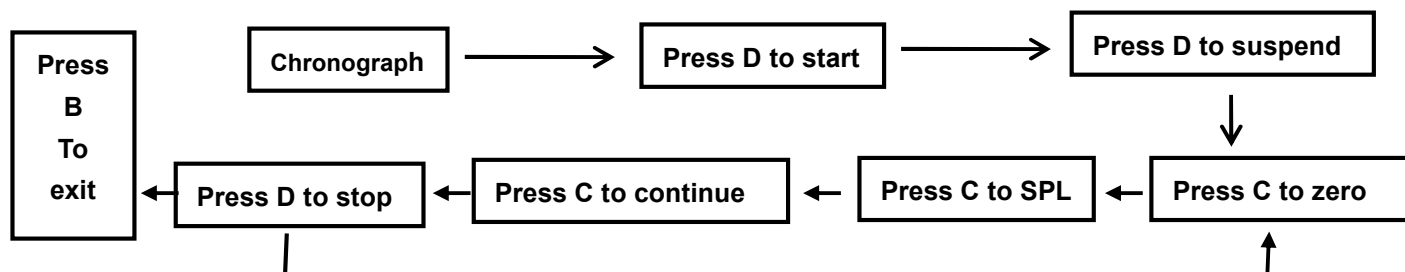

Second Time Setting

- In Second Time Mode, in the corner will show the symbol "DT"
- Hold C key till the Hour flashing then enter into DT time setting Mode
- Press B to choose Hours - Minute, Press D Key to adjust the data
- Press C key to exit.

Count Down Setting

- In Count down Mode, in the corner will show the symbol "TR"
- Hold C key till the Hour flashing then enter into TR time setting Mode
- Press B to choose TR Hours - Minute, Press D Key to adjust the data
- Press C key to exit the setting, press D key to start count down, press D key again to suspend, press D key again to start again
- After you suspend the count down, press C key to stop count down function back to the count down time which you setting
- After you start the count down, press M back to Normal Time Mode, and the count down working on the background.
- Count down time could be setting between 1 minutes to 24H if you wanna to setting the count down time setting in 24H, then setting the count down time in 0:00:00
- After you finished the count down to 0:00:00, the watch will chime for 15s, press any key to stop chime and back to the count down time which you setting.